


Active cryo cooling for space application

Turnkey solutions from 10K to 200K



- ✓ High reliability
- ✓ Longlife without maintenance (up to 20 years)
- ✓ Very low level of induced vibration (compatible with optical stability requirement)
- ✓ Enabling satellite agility through orientation independant operation
- ✓ Easy to integrate on your payload
- ✓ Mass/power effective

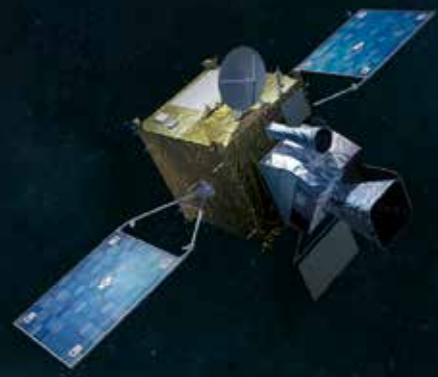



Capitalizing on its cryogenic engineering capabilities and extensive experience on space specific requirements, Air Liquide has developed a range of coolers based on Pulse Tube technology.

These Pulse Tube coolers operate with no moving parts in the cold finger **which represents a major technological improvement compared to Stirling coolers**. Even at higher temperatures (> 100K) it is a valuable alternative to passive cooling, thanks to its compactness, low mass and orientation independent operation. **All our coolers and systems are fully compatible with space constraints**. This innovative cryo cooling solution can be integrated into scientific, earth observation, astronomy and meteorology satellites.

Air Liquide offers both standard and customized **turnkey solutions to meet your specific needs** and supports you throughout the different phases of your project:

- From feasibility studies to space qualified flight models...
- From power bus to focal plane...
- Products are available as standard off the shelves or can be customized to user needs.



Contacts

Air Liquide Advanced Technologies

2, rue de Clémencière
BP 15 – 38360 Sassenage, France
Phone: +33 4 76 43 62 27
E-mail: gcom.alat@airliquide.com
www.advancedtech.airliquide.com


Applications

- Earth Observation
- Astronomy
- Meteorology
- Sciences...

Operating range

(Operating point can be optimized to meet your specific needs)

Air Liquide Cryocooler family typical characteristics

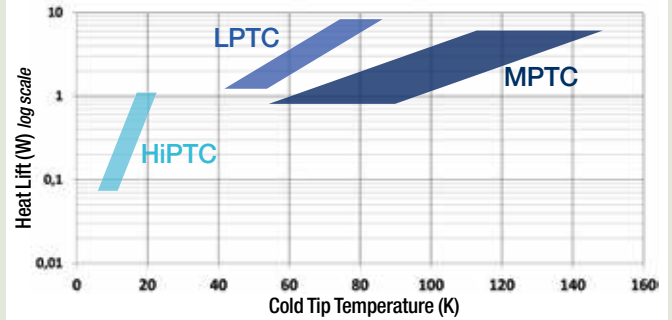

	Max. input power (w/o electronics)	Mass (w/o electronics)	Temperature range	Heat Lift range
MPTC (Miniature Pulse Tube Cooler)	50W	3.8kg	80K - 150K	1W - 5W
LPTC (Large Pulse Tube Cooler)	160W	7.3kg	50K - 80K	2W - 8W
HiPTC (Heat intercepted Pulse Tube Cooler)	300W	18kg	80K - 100K (St. 1) 10K - 20K (St. 2)	1W - 3W (St. 1) 0,05W - 1W (St. 2)

Key references

- Air Liquide was selected by Thales Alenia Space to supply integrated solutions to cool Focal Plane Arrays around 50-60K in the frame of the Meteosat Third Generation (MTG) program.
- The Air Liquide LPTC cooler was also selected by Thales Alenia Space for one of its program.
- Airbus Defense and Space and the CNES selected the pulse tube cryocooler of Air Liquide advanced Technologies to handle the cooling of the new generation Infrared Atmospheric Sounding Interferometer (IASI-NG).

Air Liquide is an historical partner in the space adventure for more than 50 years, bringing the space community its pioneering spirit, its innovation capacity, its expertise and its technical excellence.

The compressor, component of the Air Liquide cryo cooling solution, is supplied by Thales Cryogenics B.V. The LPTC is developed by Air Liquide under CEA Licence.

www.airliquide.com



The world leader in gases, technologies and services for Industry and Health, Air Liquide is present in 80 countries with approximately 65,000 employees and serves more than 3.5 million customers and patients.